


## S4II: RUGGED HANDHELDS

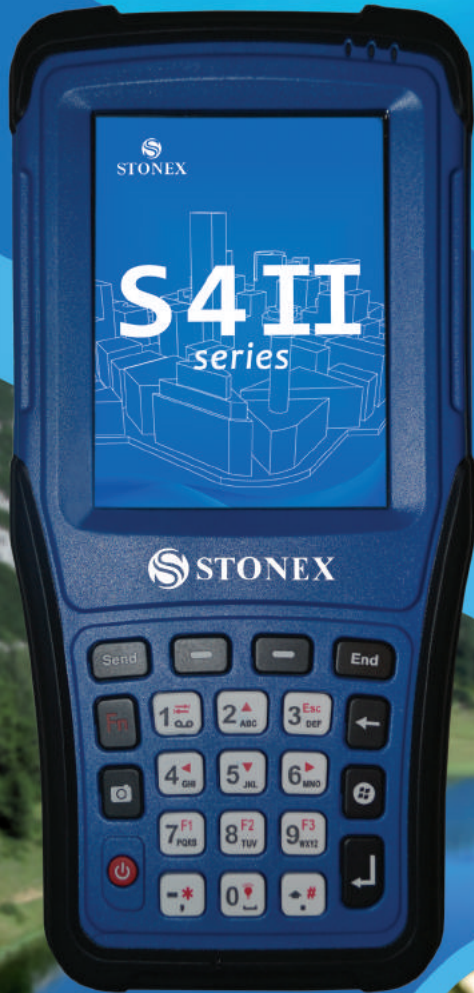

### RUGGED, RELIABLE, HIGHLY PRODUCTIVE

STONEX S4 II is the new entry in the Stonex rugged handheld family. Integrated devices, suitable for all the jobs where a rugged and high performances Windows Mobile™ PC is required. The concept of the design process of the new STONEX S4 II was to improve the features of the well know S4C/H in each component, and the goal was fully reached: faster, more rugged, improved GPS, memory expanded are just a short list of the improvements of S4 II.

### WORK ALWAYS, IN EVERY WEATHER CONDITION

The S4 II rugged and reliable design, combined with the IP67 Certification rating can withstand any harsh environment. STONEX S4 II can be used in any situation wherever the field staff goes. Complete product certifications and the advanced manufacturing process, ensure that the device is high-efficient steady and durable, it can bring an unprecedented experience even for GIS users.

### ADVANCED FEATURES IN ONE HAND

STONEX S4 II features a powerful 72 channels GNSS (GPS, GLONASS/BEIDOU, SBAS, QZSS) embedded receiver, one internal 5 megapixel autofocus HD camera, global communication facilities - GPRS quad band modem, Wi-Fi and Bluetooth, battery for 10 hours operating time. The high-brightness 3.7" TFT Blanview VGA 640x480 display, readable even in direct sunlight conditions, and the removable high-capacity lithium smart battery with power management chip, give STONEX S4 II an excellent working capability for one working day.

The internal removable battery lasts many hours of endurance GPS after a single charge.

### ADVANCED GPS FEATURES

STONEX S4 II supports RTCM 2.3 differential correction signals from CORS and GPS networks: in addition to the worldwide correction signals WAAS, EGNOS, GAGAN, MSAS, QZSS the positioning accuracy can be increased up to 1 m.



Wi-Fi, Bluetooth, GPRS modem, 5 MP camera, voice call and MMS  
mini waterproof USB connector, RS232 serial port

## KEY FEATURES

### EMBEDDED HIGH PERFORMANCES GPS RECEIVER

Real-time positioning accuracy of 2.5 m, provide a suite of modestly priced integrative solution for GIS Users

### RTCM DIFFERENTIAL AND NMEA SUPPORT

Improve the positioning accuracy connecting to GPS network

### 5 MEGAPIXEL EMBEDDED CAMERA

For high quality images and videos

### IP67 CERTIFIED

Works in any harsh condition

### FULL COMMUNICATIONS SET

USB, RS232 serial port, Wireless LAN, Bluetooth 2.1 and TF card socket

### EXCELLENT SUNLIGHT READABLE DISPLAY

3.7" TFT VGA industrial high contrast display, readable under full sunlight from any viewing angle

## TECHNICAL FEATURES S4II C/H

### HARDWARE

Operating System	Windows Mobile 6.5
Processor	TI Sitara™ AM335x 1GHz
RAM	512MB
ROM	8GB (up to 32GB) SD expansion to 32GB

### INTERFACE AND INPUT

Multi-media	Integrated speakers, microphone, telephone handset, support for recording and playback
Soft Key	Digital Soft keyboard character input, support handwriting and spelling input
External Power Supply	External power connector
SD Card Slot	Supports SD up to 32 GB
USB port, Serial port	Yes

### DISPLAY

Model	Blanview TFT, LED Backlighting
Resolution	480 x 640 VGA
Size	3.7 inch

### ADDITIONAL FEATURES S4 II H

### CAMERA

Static Mode	AutoFocus 5 MP
Image Format	JPG (2048x1536)
Video Mode	Up to VGA resolution

### GPS SPECIFICATIONS

Channels	72
Tracked Satellites	GPS/QZSS: L1 C/A code
	SBAS: L1 C/A code
	WAAS, EGNOS, MSAS
	GLONASS: L10F
	GALILEO: E1 B/C
	BeiDou: B1
Accuracy	Velocity accuracy: 0.05 m/s
	Position accuracy: 2.5 m
	Post processed 1.2 m

Specifications subject to change without notice

### DATA COMMUNICATION

Bluetooth Device	2.1+EDR
WIFI	802.11 b/g Wireless LAN

### POWER SUPPLY

Battery Capacity	7.2 V, Removable Li-Ion 24.4Wh
Working Hours	Up to 10 hours (S4II H)
	Up to 12 hours (S4II C)

### PHYSICAL SPECIFICATIONS

Size	193 x 91 x 42 mm (L*W*D)
Weight	600 g (battery included)
Relative Humidity	5% ~ 95% non-condensing
Operating Temperature	-30°C to +60°C (-20°C)
Storage Temperature	-30°C to +70°C
Waterproof/Dustproof	IP67
Drop	Withstands 1.5m free drop onto hard surface

### STANDARD ACCESSORIES

Carton package, Adapter, USB cable, Battery, Handstrip, Stylus & string of pen, CD and Manual, Screen protector, Charger set

Max navigation Update Rate	4Hz
Cold Start	29s

SUPPORTED PROTOCOLS  
Support RTCM 2.3, differential NMEA 0183  
UBX binary, u-blox proprietary

### DATA COMMUNICATION

Communication module	Built-in universal quad-band communication module (WCDMA)
Multi-media	Multimedia message
Voice Calls	Included
SIM Card	SIM Card Socket



STONEX AUTHORIZED DEALER

STONEX® srl

Via Cimabue 39 - 20851 Lissone (MB) Italy  
Phone +39 039 2783008 Fax +39 039 2789576  
www.stonexpositioning.com  
info@stonexpositioning.com